

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number  
**WO 2004/055385 A1**

(51) International Patent Classification<sup>7</sup>: F15B 11/05  
(21) International Application Number:  
PCT/IT2002/000798

(22) International Filing Date:  
17 December 2002 (17.12.2002)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant: NEM S.R.L. [IT/IT]; Via Piccard, 6/A-B,  
I-42100 Reggio Emilia (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MANFREDI, Danilo  
[IT/IT]; Via Manfredi, 11, I-42038 Felina di Castelnuovo  
Monti (IT).

(74) Agent: COLLI, Alfonso; Bugnion S.p.A., Via Borsellino,  
22, I-42100 Reggio Emilia (IT).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A CONTROLLED-FLOW HYDRAULIC DISTRIBUTOR

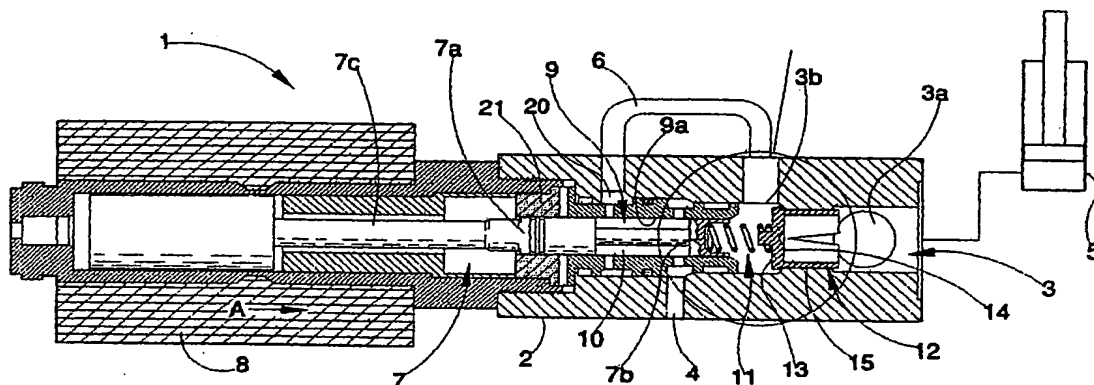

(57) **Abstract:**—The hydraulic distributor exhibits a cylindrical and internally-hollow body (2) having an inlet chamber (3) for a fluid and an outlet chamber (4) which are interconnected directly (by a communication conduit), or indirectly by an external distributor. A cursor (7) is axially mobile in the hollow body (2) and a closing element (12) is associated to the cursor (7) by elastic means (11). The closing element (12) is mobile in the inlet chamber (3) between a first position in which it occludes the inlet chamber (3) and a second position in which it permits passage of fluid from an antechamber (3a) to a second opening (3b).

WO 2004/055385 A1